

Take Control. **ION** Technologies

A division of Metropolitan Industries, Inc.



Ion Genesis®

**3 YEAR
WARRANTY**



Smart Controller and Sensors

The Ion Genesis is a first of a kind digital pump controller that is designed to operate one or two pumps, alternating or simultaneously, with combined amp draws of 12 amps. The Ion® digital level sensors are used in place of standard float switches and allow for an adjustable on level from 2.5" to 72" in 0.5" increments. The Ion Genesis controller incorporates smart sensing technology that utilizes critical system information such as pump amp draw, how long the pump operates, water level, and many more features.

You can collect and analyze system data never before possible with the level sensor controllers. Any change or variation in your system performance will sound an alarm or alert of possible equipment failure before flooding occurs. This new technology allows you to adjust the turn on level of your system without removing the system cover.




37 Forestwood Dr., Romeoville, IL 60446
www.ionproducts.net [815] 886-9200

Patent No. 8,591,198, 9,033,686,
9,680,401, 8,907,789 and 9,958,878

Ion Genesis®

Smart Controller and Sensors

Typical Installation Diagram

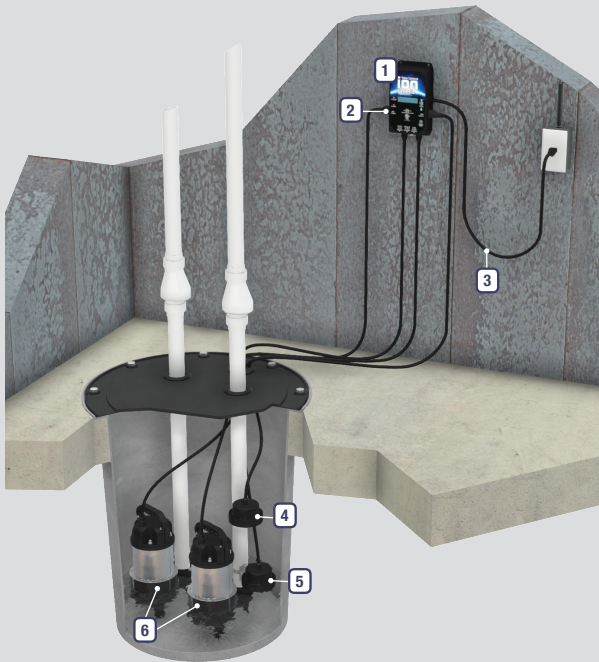

1. Ion Genesis
2. Pump outlets
3. Power cord
4. High water sensor
5. Digital level sensor
6. Pumps (not included)

System Features



1. LED Lights: Indicate when the pump or pumps are running, system power, and alarm mode.
2. LCD Screen: Displays vital equipment data and alarm notifications.
3. Plug & Play Outlets: Pump(s) plug directly into controller just as they would a wall outlet.
4. Ion Digital Level Sensor: Communicates system levels to the Ion Genesis controller.
5. Ion Digital High Water Sensor: Detects high water and also acts as a secondary switch in case the primary Ion sensor fails.
6. Remote Alarm Contact: Connects to optional dialer or existing security system for remote monitoring when you're away.
7. Reset/Test Button: Allows user to manually test system without having to access basin.
8. On Level: Manually adjust the pumping turn on level from 2.5" to 72" in 0.5" increments.

System Specifications

- Featuring Ion digital level sensors
 - First of its kind solid-state sensing technology with no moving parts
 - Multipoint sealing mechanism that supersedes single surface seals
- Voltage: 120 VAC, 60 Hz
- Output Capacity (per outlet): 1/2 HP, 12 FLA, 15 amp max, 72 LRA
- Remote Alarm Contacts: Normally closed (open during alarm state) 30 V/DC @ 1 amp max
- Temperature Range: 32° F to 104° F (0° C to 40° C)
- Audible Alarm: 80 dB @ 10 ft.
- Enclosure: NEMA-1 UL94V-0 ABS
- Mounting Hardware (controller): (4) #10 Screws (not included)
- Mounting Dimensions (controller): 8.25" X 3.5"
- 3 year warranty
- Sensors available with 10' or 20' cords
- Part Number: iNG20503