



# Technical Sheet

## Fully-Recessed

- P8FPM
- P12FPM

### Suggested Specification

Model P8FPM shall deliver 8.0 gph of 50° F water at 90° F ambient and 80° F inlet water per ASHRAE 18 testing. Model P12FPM shall deliver 12.0 gph of 50° F water at 90° F ambient and 80° F inlet water per ASHRAE 18 testing. Shall have a push button on the front of the cabinet. When the mechanical push-button is depressed, water continues to flow as long as the button is depressed. Cabinet finish shall be brushed stainless steel. Shall use R-134a refrigerant. Shall comply with ANSI 117.1. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with NSF/ANSI 61 and NSF/ANSI 372.



### Models

- P8FPM delivers 8.0 gph of chilled drinking water
- PLF14S delivers 12.0 gph of chilled drinking water

### Standard Features

- Mechanical push button
- Waterways are Lead-Free in materials & construction
- Stainless steel panels and backsplash
- Welded, heavy-gauge steel frame
- High efficiency cooling system

### Finishes

- Standard cabinet finish: Stainless steel

### Installation

- Prior to roughing consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket
- Removable side and front panels provide easy access for installation

### Options

- Carafe fillers (factory installed 030239-003)

### Limited 5-Year Warranty

(Continental limits of the United States and Canada)  
Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

### Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

### Certifications/Compliance

- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act.



**WARNING:**  
Cancer and Reproductive Harm  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)




Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot'N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
P8FPM	8.0	8.0	No	No	1/4	4.8	480	Yes	Yes	92 Lbs
P12FPM	12.0	12.0	No	No	1/3	5.4	540	Yes	Yes	96 Lbs

\*Industry standard rating condition 80° F inlet water temperature

Specifications subject to change without notice

# OASIS® FULLY-RECESSED WATER COOLER MODELS

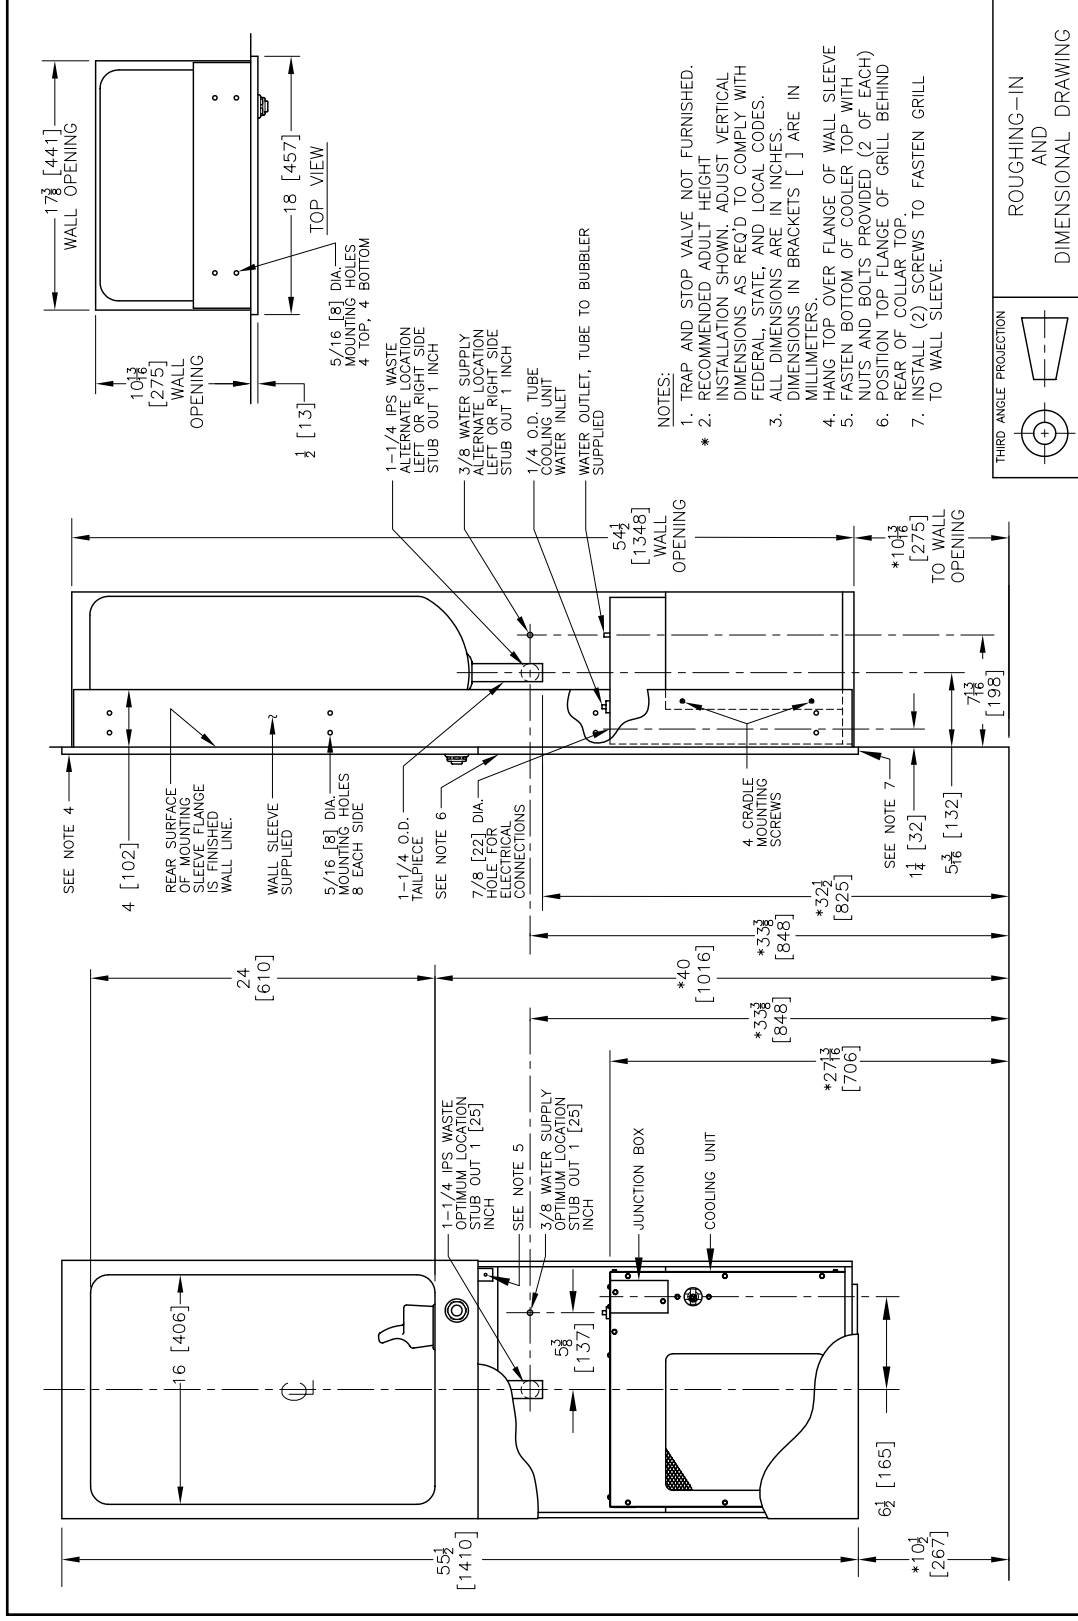

THIRD ANGLE PROJECTION  

 ROUGHING-IN AND DIMENSIONAL DRAWING



**OASIS INTERNATIONAL** [www.oasiscoolers.com](http://www.oasiscoolers.com)  
 222 East Campus View Blvd.  
 Columbus, OH 43235  
**1-800-646-2747**

OASIS is a registered trademark of LVD Acquisition, LLC dba Oasis International, © 2019 LVD Acquisition  
 AS0020-F-1912