

STAINLESS STEEL

HAND SINKS ELECTRONIC OPERATED FAUCETS



Conforms To NSF 61/9 Lead Free Requirements



ltem #:	Qty #:
Model #:	
Project #:	

## FEATURES:

One piece **Deep Drawn** sink bowl design. Sink bowl is 10" x 14" x 5".

"Hands Free" Electronic Faucet makes use of infrared technology to sense the user's presence and immediately turn on water supply that is pre-mixed to desired temp.

Standard Electronic gooseneck faucet is splash mounted and comes complete with AC/DC control module, sensor, 4 "AA" batteries and spout.

All sink bowls have a large liberal radii with a minimum dimension of 2" and are rectangular in design for increased capacity.

Stainless steel basket drain 1 1/2" IPS.

#### **Specific Features:**

**7-PS-51 & 7-PS-81** lever operated drain and built-in overflow with plastic overflow tube and spring clamps. P-Trap is 1 1/2".

**7-PS-81** towel dispenser with hinged towel box. Unit uses standard C-fold towels. Liquid Soap dispenser.

7-PS-91 pedestal skirt.

### **CONSTRUCTION:**

All TIG welded.

Welded areas blended to match adjacent surfaces and to a satin finish.

Die formed Countertop Edge with a 3/8" No-Drip offset. One sheet of stainless steel - No Seams.

### **MATERIAL:**

Heavy gauge type 304 series stainless steel. Electronic Faucet solid brass, chrome plated. Wall mounting bracket is stainless steel and of offset design. All fittings are brass / chrome plated unless otherwise indicated.

#### **MECHANICAL:**

Electronic faucet is 1/2" male IPS thread. K-175 Replacement Electronic Operated Faucet. Faucet Flow Rate: 1.0 GPM/3.8 LPM aerator. 60 PSI.

## **WARNING:**

Equipment that includes a faucet may expose you to chemicals, including lead, that are known to the State of California to cause cancer or birth defects or other reproductive harm. For more Info.,visit www.p65warnings.ca.gov.



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 7:00 pm E.S.T.

For Orders & Customer Service: Email: customer@advancetabco.com or Fax: 631-242-6900 For Smart Fabrication™ Quotes: Email: smartfab@advancetabco.com or Fax: 631-586-2933


**REF-B** 

# **DIMENSIONS and SPECIFICATIONS**

TOL Overall: ± .500" Interior: ± .250"

FITTINGS SUPPLIED AS SHOWN

ALL DIMENSIONS ARE TYPICAL

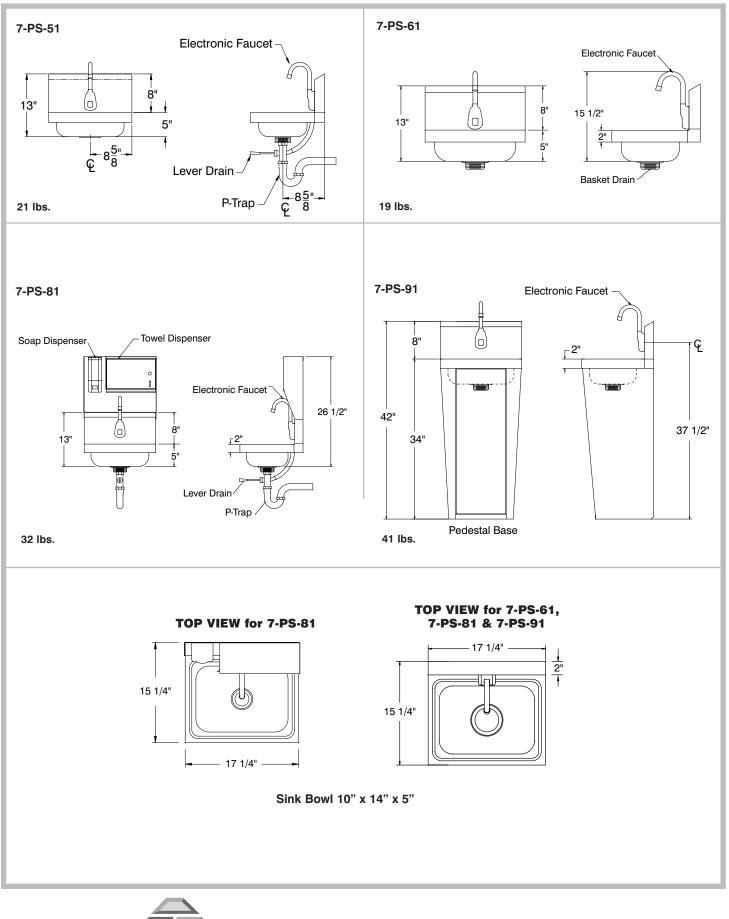

ADVANCE TABCO.

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice. © ADVANCE TABCO, FEBRUARY 2020